



# 720BT Wireless Headset

Optimized for Microsoft Teams & UC Platforms


User Manual



# Catalog

1. Product Overview-----	1
2. Basic Operation-----	2
3. Bluetooth Pairing and Connection-----	4
4. Connection with Two Devices-----	6
5. LED Indicator-----	7
6. Charging-----	8
7. TT Tone-----	9
8. Product Specification-----	10
9. Attentions and Q&A-----	12



## 1. Product Overview

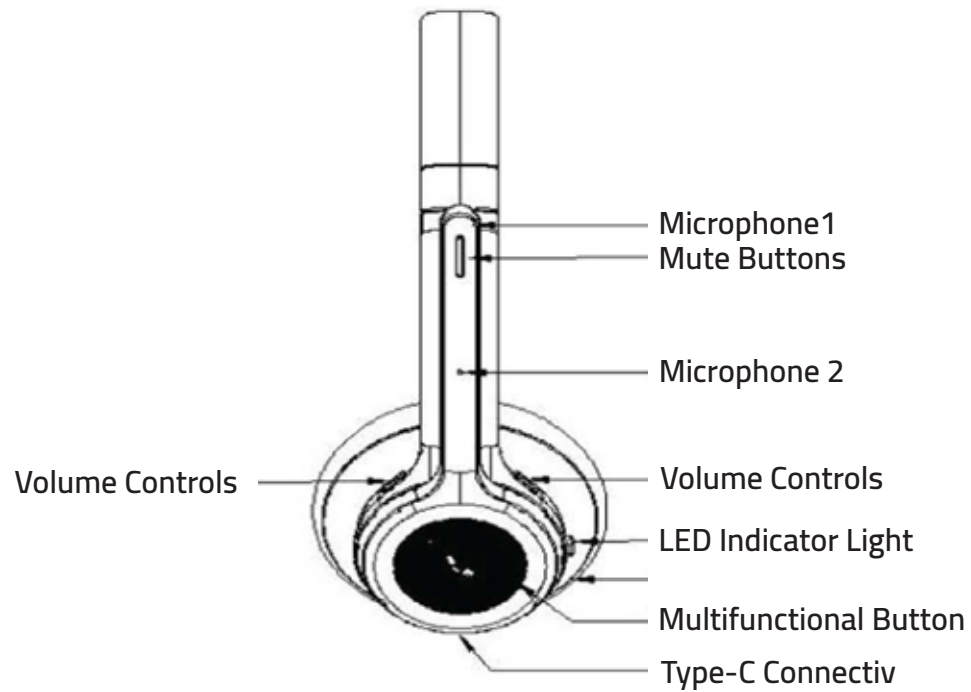

1. **Microphone1**
2. **Mute Buttons:**
3. **Microphone 2**
4. **Volume Controls**
5. **LED Indicator Light**
6. **Multifunctional Button**
7. **Type-C Connectiv**

## Packing list:

- A. Bluetooth Headset LIVEY 720BT X1
- B. Type\_C USB Charging cable X1
- C. USB Dongle for 720BT X1
- D. User Manual X1



## 2.Basic Operation

### Bluetooth Headset

Button	Function	Operation Instruction
Toggle Switch	Power on	In off status, toggle the switch to the ON side to power on.
	Power off	In on status, toggle the switch to the OFF side to power off.
MFB	Enter Pairing Mode	After power on, Red & Blue lights flash alternately to enter the pairing mode. Turn off the Bluetooth of the mobile phone manually, and the headset enters the pairing mode
	Play / Pause	Short press when play music.
	Redial A Call	In connected status, double press MFB to dial the last call.
	Voice Dialing	In connected standby, long press MFB for 1 second then release.

	Audio Switch	When during a call, long press MFB for 1-2 seconds then release to switch audio between phone and headset.
	Three-way calling function	<p>1. New call coming during call, short press the MFB to answer the new call and hang up the current call;</p> <p>2. New call coming during call, double press the MFB to answer the new call and keep the current call;</p> <p>3. New call coming during call, long press the MFB for 2 seconds to keep the current call and reject the new call.</p> <p>4. When you are on a three-party call, double press the MFB to switch audio between the current call and the keep call.</p>
	Answer a call	When a call incoming, short press MFB to answer.
	Hang up a call	When during a call, short press MFB to hang up.
	Reject a call	When a call incoming, long press MFB for 1 second to reject a call.
Volume +	Volume Up	When in a call or in music status, short press" Volume+"
	Next Song	When in music status, long press" Volume+" for 1 second
Volume -	Volume Down	When in a call or in music status, short press" Volume-"
	Previous Song	When in music status, long press" Volume+" for 1 second
Microphone Mute Button	Microphone Mute	When during a call, short press mute button to mute, press again to cancel.
Combine Button	Delete pairing record	In standby mode or in music status, long press" MFB" and "Volume-" for 5 seconds at the same time, red and blue LED flash once at the same time.

## Dongle

Function	Operation Instruction
Power On	In off status, insert USB to computer device to power on, dongle display name on PC is "LIVEY 720BT".
Power Off	In on status, unplug USB to power off.

Teams answer /hang up	With business Teams, you can use "MFB" button to answer and
Teams Mute/ Cancel Mute	With business Teams, you can use "Mute" button to control teams call mute / cancel mute, the Mute icon of Teams client will change
Teams pop-up windows	With business Teams, in connected status, double press "Mute Button" to pop up windows.
Teams raise hand during a meeting	With business Teams, long press "Mute Button" for 1 second to raise hand during a meeting, perform this operation again to cancel.
Delete pairing record	In disconnected status or connected status, dongle display name will show on PC as "LIVEY 720BT" , repeat mute/cancel mute on PC for 10-11 times to delete pairing records, dongle blue light flash quickly.

### 3. Bluetooth Pairing and Connection

#### Bluetooth Headset

A. In off status, toggle the switch to the ON side to power on, with Red & Blue lights flash alternately.

B. Search and click to connect "LIVEY 720BT" on your phone Bluetooth lists, LED change to Blue and flash slowly ( flashes 1 time every 10 seconds ) after connected, your phone will show that "LIVEY 720BT" has been connected, now you can play music from phone to headset.

C. You can press MFB / Volume+ / Volume- / Microphone Mute Button on the Bluetooth headset to control the answer/hang up a call and play/pause of the music, next and previous song, volume up and down, microphone mute.



## Pair Headset with Dongle

1. Insert dongle to PC/laptop, dongle display name will show on PC/laptop as "LIVEY 720BT" , repeat mute/cancel mute on PC for 10-11 times to delete pairing records, dongle blue light flash quickly.
2. In ON status, long press "MFB" " Volume-" on the headset at the same time for 5 seconds, Red and Blue LED flash once at the same time to delete pairing records on headset, headset will enter pairing mode with Red and Blue LED flash alternatively.

3. Put the headset close to the dongle, when dongle turn to solid blue LED, and headset turn to blue LED and flash once every 10 seconds, paired successfully.

#### 4. Connection with Two devices

A. The mobile phones connected to LIVEY 720BT are divided into two sets: Machine A and Machine B;

B. Connect machine A first. Toggle the switch to ON to enter pairing mode, turn on the Bluetooth of machine A and search for "LIVEY 720BT" and then click to connect. After the connection is successful, turn off the Bluetooth of machine A and LIVEY 720BT enters pairing mode again.

C. Then use machine B to connect with LIVEY 720BT, according to the method of machine A. After the pairing is successful, turn on the Bluetooth of machine A and click LIVEY 720BT to connect. (Some mobile phones may have the automatic connection function).



\*Music only can be played from one phone under two connections, when you want to play music from another phone, you need to pause or close the music of the previous phone. The same operation during talking status.





## 5.LED Indicator

### Bluetooth Headset

Status	LED Indicators
Power on	Blue LED flashes 2 times
Power off	Red LED flashes 2 times
Pairing mode	Red and Blue LED flash alternately
Connected standby mode	Blue LED flashes once every 10 seconds
Playing Music	Blue LED flash once every 10 seconds
Talking	Blue LED flash once every 10 seconds
Delete pairing record	Red and Blue LED are on for 1 second at the same time
Charging	Solid Red LED
Full charged	Red LED turns off, Blue LED turns on
Low battery	Red LED flashes

### Dongle

Status	LED Indicators
Power on	Blue LED flashes
Power off	Blue LED off
Pairing mode	Blue LED flashes quickly
Reconnected	Blue LED flashes once every 1 second
Connected standby mode	Solid Blue LED

## 6. Charging


Please charge the LIVEY 720BT at once when the Red LED flash. Charging time is about 2 hours. Solid Red LED turn off and Solid Blue LED turn on when full charged.

### Charge Connection

Please connect to the LIVEY 720BT charging port through the Type-C end of Type-C charging cable.

### Wired Function

In power on status, connect the headset to PC with data cable to achieve wired function. (Noted: In connected status that the headset will disconnected and turn to wired connection, if connect USB HUB in connected status, the headset will also disconnected and turn to wired connection also.)

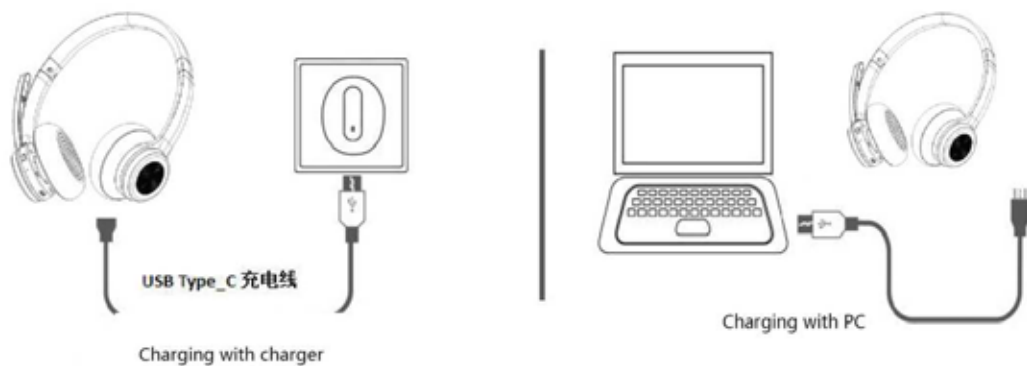

### \*Note:

Please charge the LIVEY 720BT at least one time every 2 months when don't t use it.

## 7.TTS Tone

Power on	Power on
Pair successfully	paired
Enter pairing mode	Pairing
Connected successfully	Your headset is connected
Disconnected	Your headset is disconnected
Power off	Power off
Low battery	With prompt tone "battery low" plays every 3 minutes
Microphone mute on	mute on
Microphone mute off	mute off

## 8. Product Specification

### Bluetooth Headset

Bluetooth Version	V5.1
Bluetooth Chipset	QCC3034
Operation Range	10 meters
Bluetooth Protocols	HSP HFP A2DP AVRCP
CODEC	APT-X HD APTX AAC SBC
Charging Time	About 2 hours
Stand-by Time	About 400 hours
Talking Time	About 40 hours

Battery Type	3.7V, 400mAh Li-ion Polymer Battery
Music Time	About 45 hours
Headset Net Weight	About 150g
Headset Dimension	177.8*169.3*68.3mm

## Dongle

Bluetooth Version	5.2
Frequency Range	2.402-2.480GHz
Support Profile	HFP A2DP AVRCP
Chip Solution	QCC3040
Operation Range	8 meters
Support connection with two devices	Not Support
CODEC	SBC APTX
Passwords for Bluetooth Headset, Bluetooth Receiver, Bluetooth Speaker	0000, 1111, 1234, 8888
Working Temperature	-10—55℃
Working Voltage Range	4.5V-6.0V
Overall Dimension	20.6*15.0*6.0mm
Net Weight	About 2g

\*The above data are all from LIVEY manufacturing, and the actual use time, environment and music will be different.

## **9. Attentions and Q & A**

### **A. How to reconnect and operation when failed to reconnect?**

When LIVEY 720BT connected with your mobile phone successfully at the first time, it will search and reconnect the paired device automatically when power on. If failed, please pair and connect again. No connection for more than 10 minutes, the headset will power off automatically. The headset can be connected back when return to the range within 10 minutes after long-distance disconnection, and it will automatically power off after more than 10 minutes.

### **B. How to delete paired records?**

Long press the MFB and Volume - Button for 5 seconds to clear the pairing record. After deleting, LIVEY 720 BT will not connect devices automatically.

### **C. What' s the password for pairing?**

Some connection devices require password for pairing. Please try 0000 or 8888 or 1111 or 1234.

### **D. What devices could charge for the headset?**

Any car charger, power bank, PC etc. which meet DC 5V, charging current more than 500mA could be charge for LIVEY 720BT.

### **E. How to do if have connect issue or dead?**

Please try charging reset, operation: plug in charging cable to charging during long press MFB button, this will reset the headset to power off. Headset can be used normally after power on. If you still cannot use it normally, you can ask customer service or manufacturer for technical support.

### **F. Power off automatically?**

LIVEY 720BT will power off if does not connect any devices for over 10 minutes, or battery voltage is less than 3.1V.