



HEADSET TRAVEL KIT

PRODUCT SHEET

LIVEY DECT Headset Travel Kit breaks down barriers, so you always stay linked to your calls and devices –at the office, on the go, or at home.

STAY LINKED AND ALWAYS CONNECTED

Communication on the go has become increasingly important in today's fast-paced world where people need to stay connected and productive, even when they are away from their desks or offices. It enables people to work from home, collaborate with team members from different locations, and stay connected while traveling.

LIVEY DECT Headset Travel Kit consists of our high-end wireless headset and DECT USB Dongle bundled nicely in a hard travel case for easy access and maximum protection. The headset supports both DECT and Bluetooth® and connects via the headset base station, USB dongle, DECT base stations, and Bluetooth®.



ONE PRODUCT—MANY USER SCENARIOS

LIVEY DECT Headset Travel Kit breaks down barriers and let you always stay linked to your calls and devices—at the office, on the go, or at home.

AT THE OFFICE

At work, you can stay connected in several ways:


1. Headset connects with your deskphone via the headset basestation.
2. Headset connects with your PC via the LIVEY DECT USB dongle or via the headset base station.
3. Headset transfers calls seamlessly from the headset basestation to the LIVEY DECT base stations.
4. Headset connects with your cellphone via Bluetooth®.



ON THE GO

When you are on the move, you can stay connected in two ways:


1. Headset connects with your cellphone via Bluetooth®.
2. Headset connects with your PC via the LIVEY DECT USB Dongle.

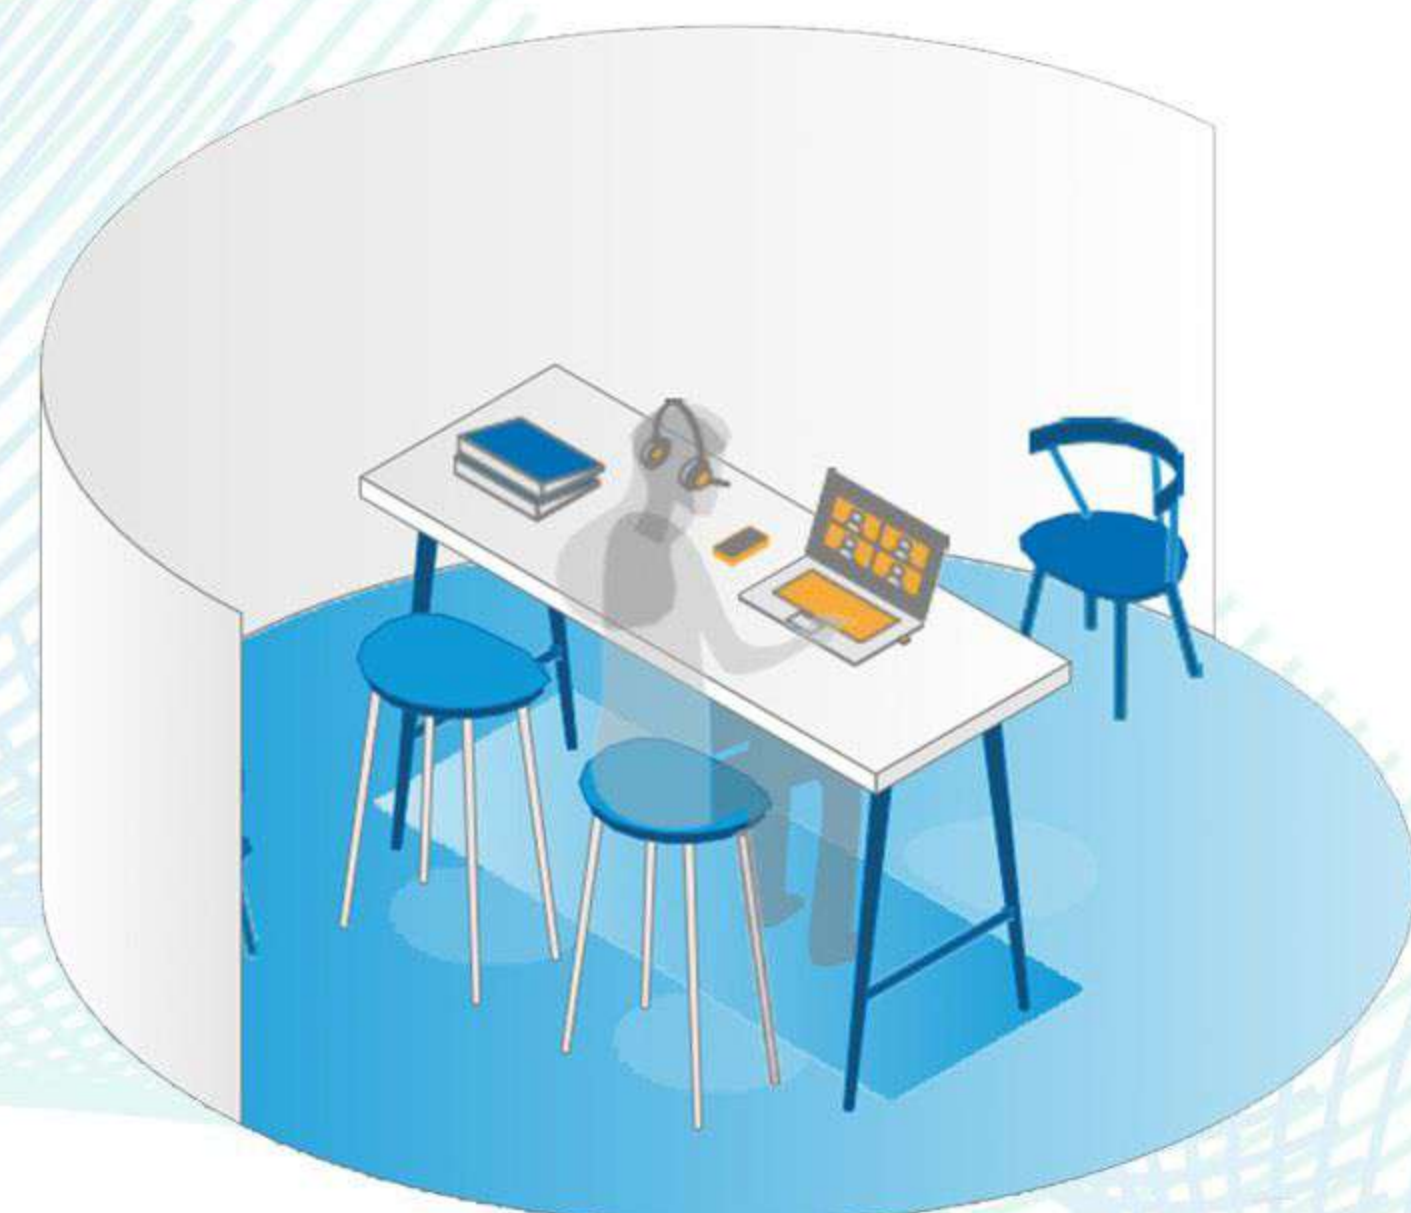

AT HOME

When you are at home, you can stay connected in two ways:

1. Headset connects with your cellphone via Bluetooth®.
2. Headset connects with your PC via the LIVEY DECT USB Dongle

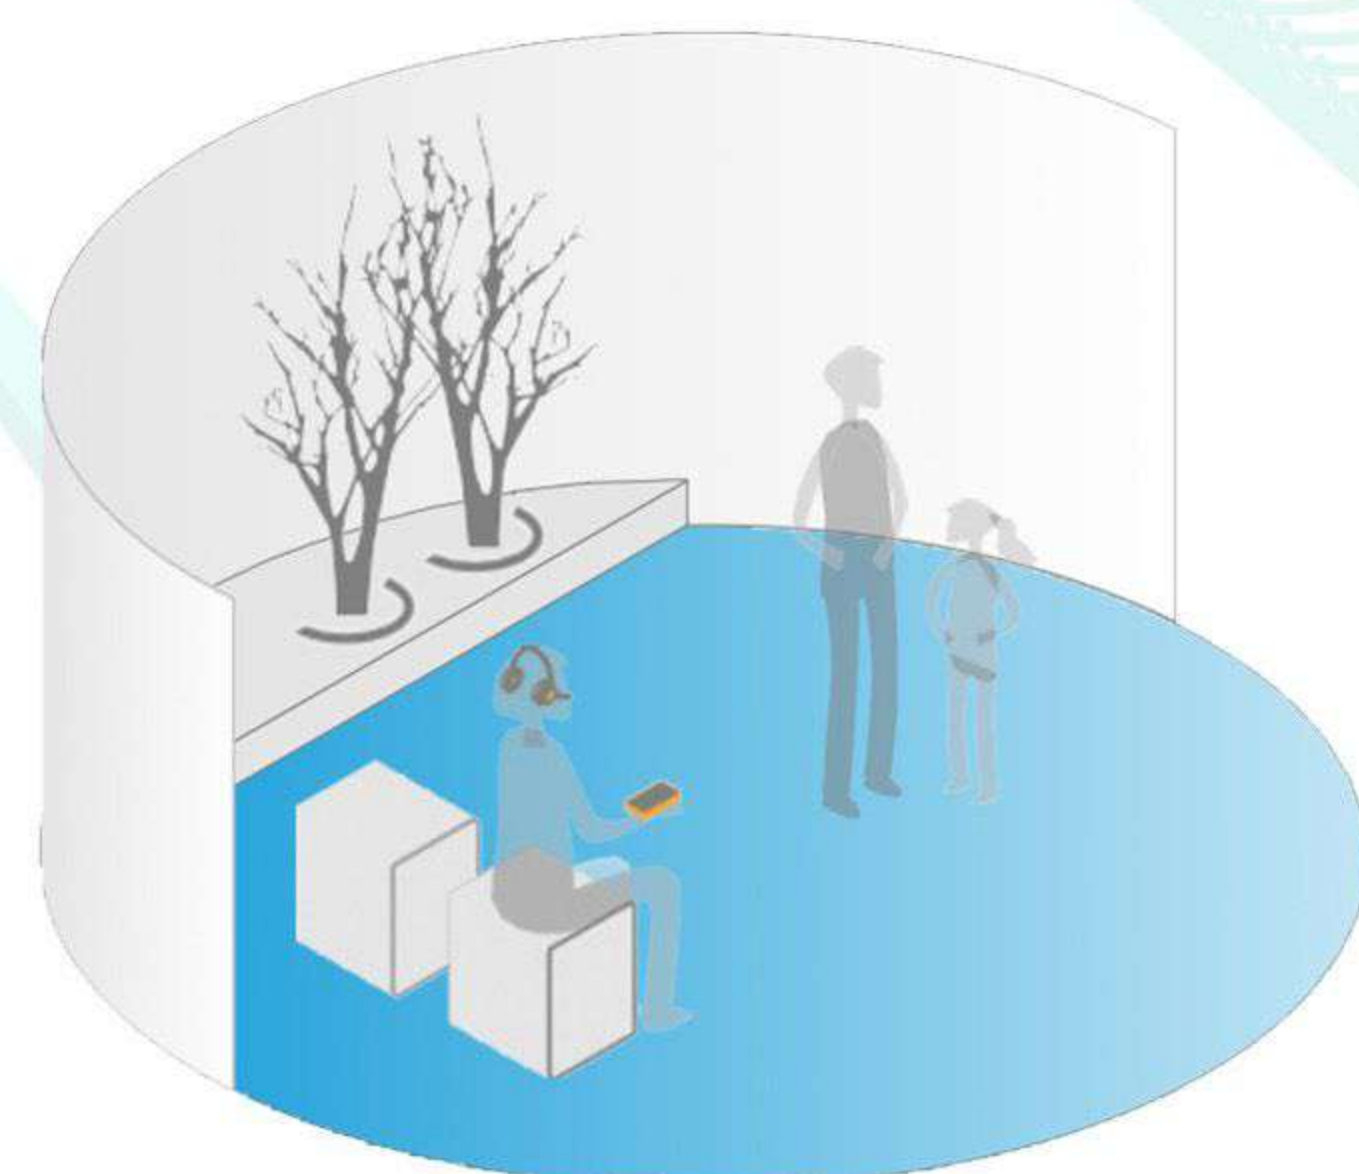

TECHNICAL SPECIFICATIONS

TRAVEL KIT PACKAGE

LIVEY HEADSET TRAVEL KIT
CONSISTS OF

- LT-D10· DUO-ANC High-end headset (stereo ANC) incl. battery
- LIVEY D1.. USB DECT Dongle
- Hard travel case
- USB cable
- Safety data sheet

LT-D650 DUO-ANC HIGH-END HEADSET (STEREO ANC)

DECT

Frequencyband:	1880–1895MHz (Taiwan) 1880–1900 MHz (EMEA) 1910–1920MHz (Brazil & Uruguay) 1910–1930MHz (LATAM, Argentina, Chile) 1920–1930MHz (USA, Canada)
Outputpower:	21dBm (Uruguay, Canada, US, Malaysia, Jordan) 22dBm (Chile, Australia) 24dBm (Rest of the world)
Sensitivity:	92dBm
Antenna:	Two for fast antenna diversity
Range(max):	200m outdoor
Security:	Class C
Encryption:	AES256
StandardDECTinterface	
Handover to VoIP multicell system	



AUDIO

Narrow band audio:	G.726, BV16
Wide band audio (HD):	G.722, BV32
Music:	128 kbit / sCELT
Coverage warning:	On / Off

LED INDICATOR

Tri color status LED
Visible on microphone boom tip

HARDWARE FEATURES

Battery:	Lithium Polymer (replaceable)
Battery capacity:	600mA
Microphones:	Two for talk (ENC) and four for ANC
Headset interface:	USB to connect to the LT-D600 BASE
USB-C charging terminals	
Operating conditions:	0°C to 45°C

LT-D650 DUO-ANC HIGH-END HEADSET (STEREO ANC)

BATTERY PERFORMANCE

Upto 20 hours talk time DECT	
Upto 10 hours talk time BT	
Upto 100 hours standby time (DECT only)	
3 hours charge time (0%-90%)	
Quick charge	25% in 30 minutes
Charge stop temperature:	Low temperature stop charge: 5°C High temperature stop charger: 40°C



LANGUAGE

Voice prompts

English
German
Danish

CALL FEATURES

Call waiting

Hold / Retrieve

Supports two simultaneous calls (only one on hold)

Call conference

Call swap

SOFTWARE UPDATE

Downloadable via USB and
base station

Wireless(DECT)
Headset placed in base station

Air-interface

PC tool

SOFTWARE UPDATE

Four pairings

BT version:

4.2 Classic

Frequency:

2401MHz–2480MHz

Sensitivity:

Better than -92dBm@DH1, measured at
antenna

Output power:

Class 2.2, 5mW (4dBm)

Range:

10 meters in free line of sight measured
outside

Antenna:

Return loss of <-5dB in the relevant
frequency band

Two simultaneous connections

Profiles:

A2DP (1.2 Advanced Audio Distribution Profile)
HSP (1.2 Headset Profile)
HFP (1.6 Hands free Profile)
DIP (1.3 Device ID Profile)
AVRCP (1.4 Audio/Video Remote Control
Profile)



Codec:	SBC (For stereo streaming of music) mSBC (For wide band call)
Class of device:	0x200404 Headset device 0x200418 Headphones
Encryption:	Default 128-bit encryption
Pairing mode:	Discoverable only by user request and limited time for 1 minute
Automatic connect:	An already paired Bluetooth® device will automatically connect to the headset

LIVEY D600 USB DECT DONGLE

DIMENSIONS	35mm (L) x 19mm (W)
DECT	1880–1895MHz (Taiwan) 1880–1900MHz (EMEA) 1910–1920MHz (Brazil&Uruguay) 1910–1930MHz (LATAM,Argentina, Chile) 1920–1930MHz (USA,Canada)
AUDIO	G726, BV16, G722, BV32, CELT 128kbit/s
LED INDICATOR	Three LEDs
HARDWARE FEATURES	Button for registration and reset Slider switch for switching between fixed part and portable part
CALL FEATURES	Call waiting, hold/retrieve
HEADSET SUPPORTED	LT-D600 MONO, LT-D650 DUO, LT-D650 DUO-ANC
CONFERENCE SUPPORT	Up to four users
CUSTOMER LOGO	Silkscreen
CALL INDICATION LED ON DONGLE	Yes



DECT CONNECTION STATUS LED
ON DONGLE

Yes

CONFIGURABLE

Yes, via PC Tool

FIRMWARE UPDATE SUPPORT

Yes, via PC Tool

USB CONNECTOR

Type A

PC WINDOWS SUPPORT

Yes

MAC/OS SUPPORT

Yes

DECT AUDIO SUPPORT

Wide-band audio: CELT, G.722,BV32

Narrow-band audio: G.726, BV16

CALL CLIENT SUPPORT

Microsoft Teams: Yes

Microsoft Skype for

Business: Yes

ADAPTIVE POWER CONTROL
(DECT)

Yes

